


Network reader of Cartadis magnetic cards for copy and print management



Cartadis TCMIRS magnetic card reader is dedicated to print and copy payment by using a Cartadis magnetic card. The **TCRS** reader is supplied with the **CMI** networkable interface for controlling the access to the printers and MFPs. The **TCMIRS** is used with the management solution for copying and printing 


Cartadis TCMIRS key functions

- ✓ Compatible with your terminals (TC11N, TC4N, TCRS), dispensers - reloaders (DRC9, CR9, CD6) and the reloadable - disposable Cartadis magnetic cards already in use.
- ✓ A keyboard and a screen enable pending prints to be selected.
- ✓ Online functioning with **Gespage** print management solution.
- ✓ Locking of the multifunction in case of insufficient credit.
- ✓ Compatible with 99% of the brands and models of network printers and MFPs.
- ✓ Fully autonomous functioning for the users with the Cartadis DRC9 dispenser - reloader (card selling and reloading).



TCMIRS: added value device

ONLINE: The TCMIRS terminal combined with the Gespage solution enables print management as well as payment with the Cartadis magnetic cards. The reloadable magnetic card can be used for the authentication of the user and the payment of his prints and copies. The use of disposable cards with Gespage is only applicable to a configuration with payment station.

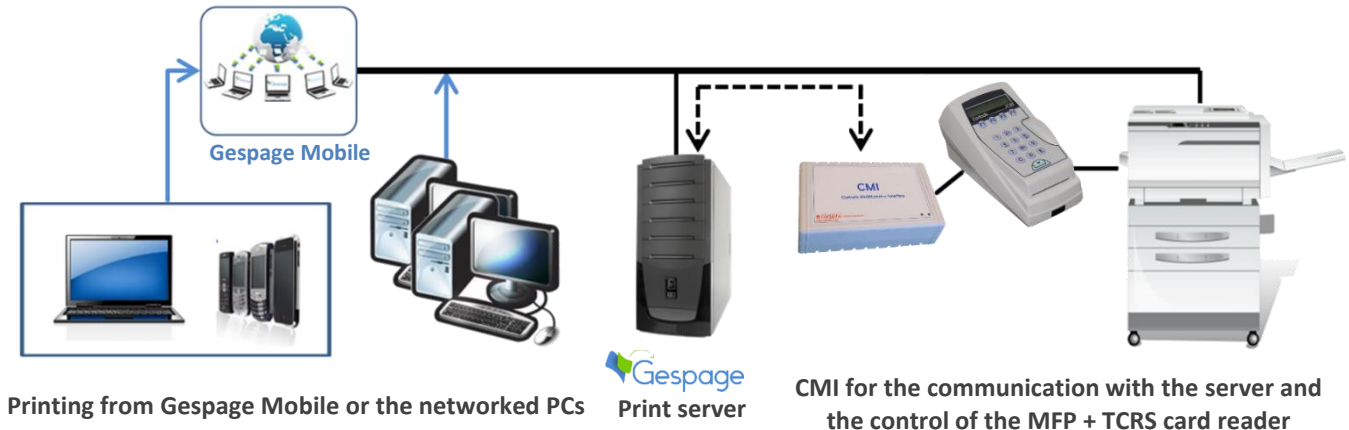

- ✓ With Gespage, management of access rights, users, issue of reports....
- ✓ Secured and on request printing with authentication via a magnetic card and selection of pending prints on the TCMIRS screen or on a payment station.
- ✓ A Gespage credit and the credit of the magnetic card may be used jointly. Therefore, a free quota can be allocated to school and university environments and make them pay for additional copies and prints.
- ✓ The 2 credits are displayed when the card is inserted and Gespage credit is the first to be used.

Specifications

- ✓ Power supply: 24V 1A.
- ✓ Reader dimensions: 100mm x 90 mm x 180mm.
- ✓ CMI Interface dimensions: 180mm x 115mm x 40mm.
- ✓ 2 lines LCD display.
- ✓ 2 Ethernet ports 10/100 Base-T.
- ✓ Standard parallel MFP interface with MFP cables for all brands. Compatible with the serial protocol of Konica Minolta MFPs.



CARTADIS

Zone des Marais – 1 Av., Louison Bobet
94120 Fontenay-sous-Bois – France
Phone (33) 1 48 77 40 60 – Fax (33) 1 48 77 36 47
E-mail: sales@cartadis.com
Web: www.cartadis.com

Your local Dealer